


## SIT V-Pulleys

On the market there are various types of **V-belts**, among which, the most 'widespread are:

- "narrow" SPZ-SPA-SPB-SPC (ISO4184 - DIN 7753)
- "classic" Z-A-B-C (ISO 4184 - DIN 2215)
- "American narrow" 3V-5V (RMA-MPTA).

The "**narrow**" **V-pulleys** (DIN2211 - ISO4183) **manufactured by SIT** and shown in this catalogue are suitable to be used with all the aforementioned types of belts. Note: for banded belts 3V - 5V - 8V use pulleys with RMA specifications (ref. pag 101). These pulleys are not standard and are available only on request.

### Compatibility table between main V-belts types and SIT V-pulleys.

		V-belts										
		ISO 4184 - DIN 7753/1				RMA - MPTA			ISO 4184 - DIN 2215			
		SPZ	SPA	SPB	SPC	3V	5V	8V	Z	A	B	C
a x b	9,7 x 8	12,7 x 10	17 x 13	22 x 18	9,5 x 8	16 x 13,5	25,5 x 23	10 x 6	13 x 8	17 x 11	22 x 14	
SIT Pulleys (DIN 2211)												
PT	SPZ	○										
	SPA	-	.	-	-	-	-	-	-	○	-	-
	SPB	-	-	○	-	-	○*	-	-	-	○	-
	C	-	-	-	X	-	-	-	-	-	-	○
PBT	SPZ	○	-	-	-	○*	-	-	○	-	-	-
	SPA	-	○	-	-	-	-	-	-	○	-	-
	SPB	-	-	○	-	-	○*	-	-	-	○	-
	SPC	-	-	-	○	-	-	-	-	-	-	○
PCT	SPZ	○	-	-	-	○*	-	-	○	-	-	-
	SPA	-	○	-	-	-	-	-	-	○	-	-
	SPB	-	-	○	-	-	○*	-	-	-	○	-
	SPC	-	-	-	○	-	-	-	-	-	-	○

○ = COMPATIBLE  
X = NOT COMPATIBLE

\* Pitch among the grooves of SPZ pulley is different from the 3V. Similarly, the pitch is also different between SPB and 5V.

## SIT V-Pulleys - production range

### PT pulleys - solid hub

Material: cast iron DIN 1691 GG-20/GG25  
Finishing: protective surface treatment.

V-groove pulleys suitable for normal application for use with the following belt types:

- SPZ-Z-3V
- SPA-A
- SPB-B-5V
- C



### PBT pulleys - for mounting taper bushing SER-SIT®

Material: cast iron DIN 1691 GG-20/GG25  
Finishing: protective surface treatment.

V-groove pulleys suitable for use with the following belts:

- SPZ-Z-3V
- SPA-A
- SPB-B-5V
- SPC-C



### PCT pulleys - oversized hub for Self Locking Units

Material: cast iron DIN 1691 GG-20/GG25  
Finishing: protective surface treatment.

V-groove pulleys suitable for use with the following belts:

- SPZ-Z-3V
- SPA-A
- SPB-B-5V
- SPC-C



### Features

Our pulleys can be used for application with a speed up to 35 m/s. The pulley dimensions are very accurate as they are manufactured only by means of CNC or automatic lathes. For higher speed is strongly recommended to use steel as material of construction.

### Balancing

Our PBT pulleys are statically balanced according to ISO. The PT pulleys are not balanced, as they do not have a finished bores.

## TOLERANCES

dw [mm]	Tolerance of pitch diameter dw [mm]	Eccentricity tolerance relevant to the outside diameter [mm]
50	± 0,4	0,2
56	± 0,4	
63	± 0,5	
71	± 0,6	
80	± 0,6	
90	± 0,7	
100	± 0,8	0,3
112	± 0,9	
118	± 1,0	
125	± 1,0	
135	± 1,0	
140	± 1,1	
150	± 1,2	0,4
160	± 1,3	
180	± 1,4	
190	± 1,5	
200	± 1,6	
212	± 1,7	
224	± 1,8	0,5
236	± 1,9	
250	± 2,0	
280	± 2,2	
300	± 2,4	
315	± 2,5	
355	± 2,8	0,6
400	± 3,2	
450	± 3,6	
500	± 4,0	
560	± 4,5	
630	± 5,0	
710	± 5,7	0,8
800	± 6,4	
900	± 7,2	
1000	± 8,0	
1120	± 9,0	
1250	± 10,0	


Max. difference among the pitch diameter of the grooves of the same pulley [mm]

SPZ - SPA - SPB	SPC
0,4	0,6

### Note


Due to a constant improvement of our products, technical data of the pulleys may be subject to changes.

## Dimension of grooves (DIN 2211)

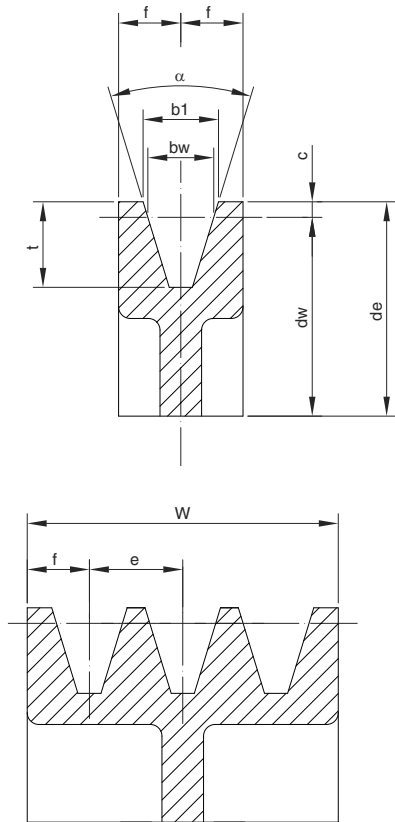

Section	SPZ [mm]	SPA [mm]	SPB [mm]	C/SPC [mm]	
b <sub>w</sub> [mm]	8,5	11,0	14,0	19,0	
b <sub>1</sub> [mm] (±0,2)	9,7	12,7	16,3	22,0	
c [mm]	2,0	2,8	3,5	4,8	
e [mm]	12 ± 0,3	15 ± 0,3	19 ± 0,4	25,5 ± 0,5	
f [mm]	8 ± 0,6	10 ± 0,6	12,5 ± 0,8	17 ± 1	
t [mm] min.	11 <sup>+0,6</sup> <sub>0</sub>	13,8 <sup>+0,6</sup> <sub>0</sub>	17,5 <sup>+0,6</sup> <sub>0</sub>	C: 20   SPC: 23,8 <sup>+0,6</sup> <sub>0</sub>	
α 34° per dw [mm]	≤ 80	≤ 118	≤ 190	≤ 315	
α 38° per dw [mm]	> 80	> 118	> 190	> 315	
Tolerance	± 1°	± 1°	± 1°	± 1°	
<b>W</b> Crown width for number of grooves Z [mm]	Z = 1	16	20	25	34
	2	28	35	44	59,5
	3	40	50	63	85
	4	52	65	82	110
	5	64	80	101	136
	6	76	95	120	161,5
	7	88	110	139	187
	8	100	125	158	212,5
	9	112	140	177	238
	10	124	155	196	263,5
	11	136	170	215	289
	12	148	185	234	314,5

## Dimension of grooves of V-Pulleys suitable for banded belts (RMA)

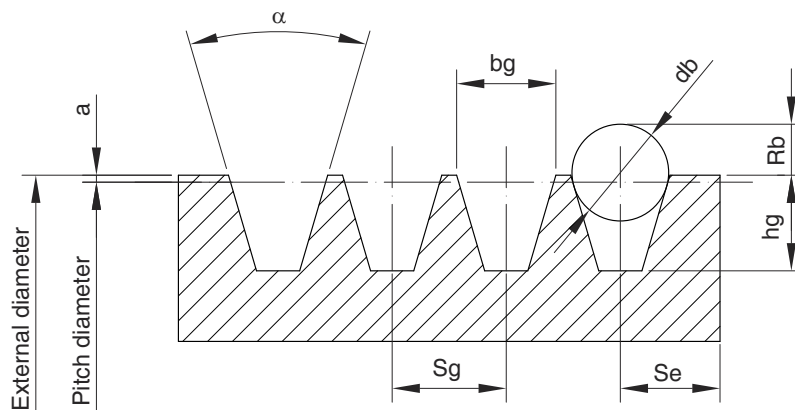

Section	D [mm]	α [°]	bg [mm]	hg min. [mm]	a [mm]	Rb min. [mm]	db [mm]	Sg [mm]	Se [mm]
<b>3V</b>	≤ 89	36 ± 0,25	8,89 ± 0,13	8,63	0,63	4,6	8,73 ± 0,01	10,3 ± 0,4	9 <sup>-2</sup> <sub>-1</sub>
	90 ÷ 152	38 ± 0,25	8,89 ± 0,13	8,63	0,63	4,6	8,73 ± 0,01	10,3 ± 0,4	9 <sup>-2</sup> <sub>-1</sub>
	153 ÷ 1305	40 ± 0,25	8,89 ± 0,13	8,63	0,63	4,7	8,73 ± 0,01	10,3 ± 0,4	9 <sup>-2</sup> <sub>-1</sub>
	> 305	42 ± 0,25	8,89 ± 0,13	8,63	0,63	4,8	8,73 ± 0,01	10,3 ± 0,4	9 <sup>-2</sup> <sub>-1</sub>
<b>5V</b>	≤ 254	38 ± 0,25	15,24 ± 0,13	14,98	1,27	8,4	15,08 ± 0,01	17,5 ± 0,4	13 <sup>-3</sup> <sub>-1</sub>
	255 ÷ 406	40 ± 0,25	15,24 ± 0,13	14,98	1,27	8,4	15,08 ± 0,01	17,5 ± 0,4	13 <sup>-3</sup> <sub>-1</sub>
	> 406	42 ± 0,25	15,24 ± 0,13	14,98	1,27	8,5	15,08 ± 0,01	17,5 ± 0,4	13 <sup>-3</sup> <sub>-1</sub>
<b>8V</b>	≤ 406	38 ± 0,25	25,4 ± 0,13	25,14	2,54	14,6	25,4 ± 0,01	28,6 ± 0,4	19 <sup>-6</sup> <sub>-2</sub>
	407 ÷ 569	40 ± 0,25	25,4 ± 0,13	25,14	2,54	14,7	25,4 ± 0,01	28,6 ± 0,4	19 <sup>-6</sup> <sub>-2</sub>
	> 569	42 ± 0,25	25,4 ± 0,13	25,14	2,54	14,9	25,4 ± 0,01	28,6 ± 0,4	19 <sup>-6</sup> <sub>-2</sub>

# Dimensions of V-Pulleys PT - solid hub





## PT SPZ-Z-3V

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
50	1	1	32*	28	16	12
	2	1	35*	35	28	7
	3	1	35*	44	40	4
	4	1	35*	56	52	4
56	1	1	32**	28	16	12
	2	1	40**	35	28	7
	3	1	42**	44	40	4
	4	1	42**	56	52	4
63	1	1	40	28	16	12
	2	1	40	35	28	7
	3	1	42	44	40	4
	4	1	42	56	52	4
71	1	1	40	28	16	12
	2	1	48	35	28	7
	3	1	50	44	40	4
	4	1	50	56	52	4
75	1	1	40	28	16	12
	2	1	50	35	28	7
	3	1	50	44	40	4
	4	1	50	56	52	4
80	1	4	40	28	16	12
	2	1	50	35	28	7
	3	1	50	44	40	4
	4	1	65	56	52	4
	5	1	65	68	64	4
85	1	4	40	28	16	12
	2	4	50	35	28	7
	3	1	50	44	40	4
	4	1	65	56	52	4
	5	1	65	68	64	4
90	1	4	40	28	16	12
	2	4	50	35	28	7
	3	4	50	44	40	4
	4	1	65	56	52	4
	5	1	68	68	64	4
95	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	50	40	40	-
	4	1	65	56	52	4
	5	1	68	68	64	4
100	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	1	65	56	52	4
	5	1	68	68	64	4
106	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	65	56	52	4
	5	4	68	68	64	4
112	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	68	52	52	-
	5	5	68	60	64	4
118	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	68	52	52	-
	5	5	75	60	64	4

\* Note: the diameter at the bottom of the groove is 32 mm  
 \*\* Note: the diameter at the bottom of the groove is 38 mm

## » PT SPZ-Z-3V


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
125	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	68	52	52	-
132	5	5	75	60	64	4
	1	4	45	28	16	12
	2	4	60	40	28	12
	3	4	60	40	40	-
	4	4	68	52	52	-
140	5	5	75	60	64	4
	1	4	55	28	16	12
	2	4	60	40	28	12
	3	4	60	40	40	-
	4	4	68	52	52	-
150	5	5	75	60	64	4
	1	4	55	32	16	16
	2	4	60	40	28	12
	3	4	68	45	40	5
	4	4	68	52	52	-
160	5	5	80	60	64	4
	1	4	55	32	16	16
	2	4	60	40	28	12
	3	4	68	45	40	5
	4	4	68	52	52	-
180	5	5	80	60	64	4
	1	4	55	32	16	16
	2	4	65	40	28	12
	3	4	68	45	40	5
	4	4	80	52	52	-
200	5	5	80	60	64	4
	1	4A	55	32	16	16
	2	4A	65	40	28	12
	3	4A	68	45	40	5
	4	4A	80	52	52	-
224	5	5A	80	60	64	4
	1	8	55	32	16	16
	2	8	65	40	28	12
	3	8	68	45	40	5
	4	8	80	52	52	-
250	5	9	80	60	64	4
	1	8	55	32	16	16
	2	8	62	40	28	12
	3	8	68	45	40	5
	4	8	80	52	52	-
280	5	9	88	60	64	4
	1	8	68	45	16	29
	2	8	68	45	28	17
	3	8	80	50	40	10
	4	8	80	52	52	-
315	5	9	96	60	64	4
	1	8	68	45	16	29
	2	8	68	45	28	17
	3	8	80	50	40	10
	4	8	96	55	52	3
355	5	9	96	60	64	4
	1	8	68	45	16	29
	2	8	68	45	28	17
	3	8	80	50	40	10
	4	8	96	55	52	3
5	9	96	60	64	4	

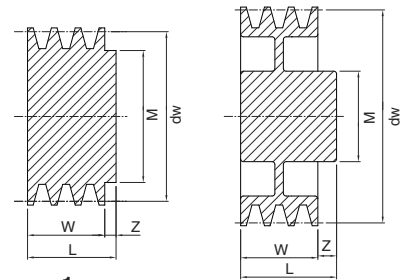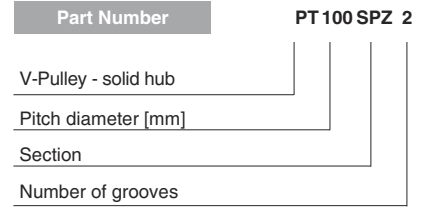

1

4

4A (with lightening bores)

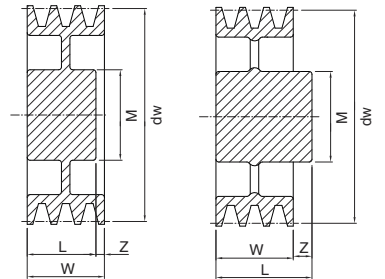


5

8 (3 spokes)

5A (with lightening bores)

8A (6 spokes)



9 (3 spokes)

9A (6 spokes)

# Dimensions of V-Pulleys PT - solid hub




## PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
50	1	1	32*	35	20	15
	2	1	40*	45	35	10
	3	1	40*	54	50	4
56	1	1	35**	35	20	15
	2	1	40**	45	35	10
	3	1	40**	54	50	4
63	1	1	40	35	20	15
	2	1	40	45	35	10
	3	1	40	54	50	4
	4	1	40	68	65	3
	5	1	40	84	80	4
71	1	1	40	35	20	15
	2	1	50	45	35	10
	3	1	52	54	50	4
	4	1	52	68	65	3
	5	1	52	84	80	4
75	1	1	40	35	20	15
	2	1	50	45	35	10
	3	1	52	54	50	4
	4	1	52	68	65	3
	5	1	52	84	80	4
80	1	1	45	35	20	15
	2	1	50	45	35	10
	3	1	62	54	50	4
	4	1	62	68	65	3
	5	1	62	84	80	4
85	1	4	45	35	20	15
	2	1	50	45	35	10
	3	1	62	54	50	4
	4	1	62	68	65	3
	5	1	62	84	80	4
90	1	4	45	35	20	15
	2	1	60	45	35	10
	3	1	62	54	50	4
	4	1	68	68	65	3
	5	1	68	84	80	4
95	1	4	45	35	20	15
	2	1	60	45	35	10
	3	1	62	54	50	4
	4	1	68	68	65	3
	5	1	68	84	80	4
100	1	4	45	35	20	15
	2	1	60	45	35	10
	3	1	62	54	50	4
	4	2	70	50	65	15
	5	2	70	50	80	30
106	1	4	45	35	20	15
	2	4	60	45	35	10
	3	4	60	50	50	-
	4	2	68	50	65	15
	5	2	68	50	80	30
112	1	4	45	35	20	15
	2	4	60	45	35	10
	3	4	60	50	50	-
	4	2	68	50	65	15
	5	2	68	50	80	30
118	1	4	60	35	20	15
	2	4	60	45	35	10
	3	1	70	50	50	-
	4	2	70	50	65	15
	5	2	80	50	80	30

## » PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
125	1	4	55	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
132	1	4	55	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
140	1	4	60	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
150	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
160	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	80	50	65	15
	5	5	80	50	80	30
170	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	80	50	65	15
	5	5	80	50	80	30
180	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	68	50	50	-
	4	5	80	60	65	5
	5	5	80	65	80	15
190	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	68	50	50	-
	4	5	80	60	65	5
	5	5	80	65	80	15
200	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
224	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
236	1	4	68	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
250	1	8	75	50	20	30
	2	8	75	50	35	15
	3	8	75	50	50	-
	4	9	88	60	65	5
	5	9	96	65	80	15

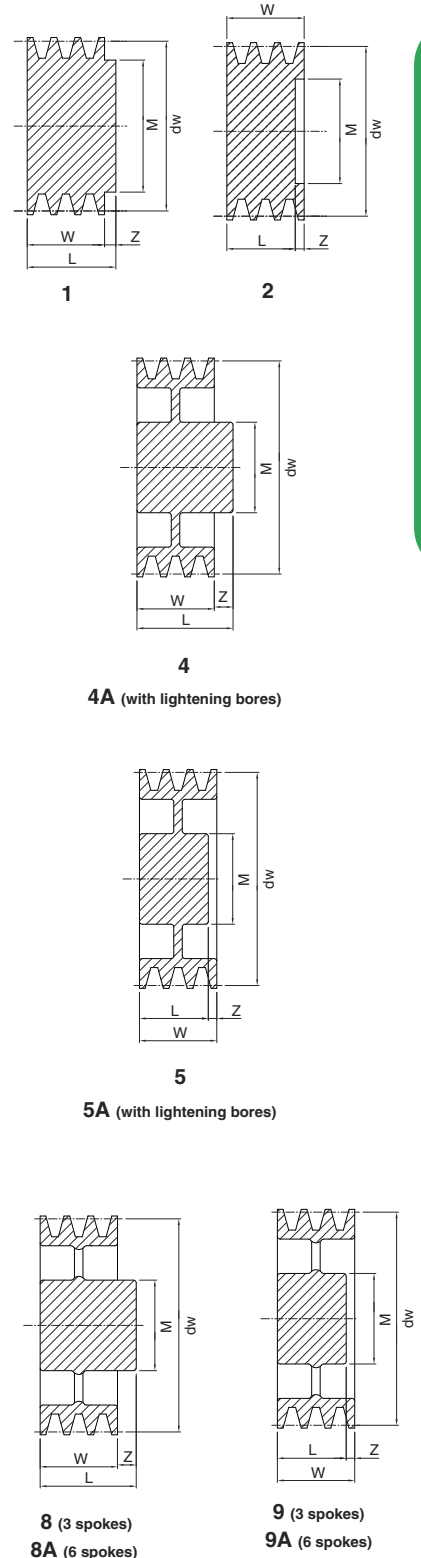


\* Note: the diameter at the bottom of the groove is 32 mm  
 \*\* Note: the diameter at the bottom of the groove is 34 mm

# Dimensions of V-Pulleys PT - solid hub




» PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
<b>280</b>	1	8	68	50	20	30
	2	8	75	50	35	15
	3	8	75	50	50	-
	4	9	88	60	65	5
	5	9	96	65	80	15
<b>300</b>	1	8	75	50	20	30
	2	8	75	50	35	15
	3	8	88	60	50	10
	4	9	88	60	65	5
	5	9	96	70	80	10
<b>315</b>	2	8	75	50	35	15
	3	8	88	60	50	10
	4	9	88	60	65	5
	5	9	96	70	80	10
	<b>355</b>	2	8	88	60	35
3		8	88	60	50	10
4		9	88	60	65	5
5		9	96	70	80	10
<b>400</b>		1	8A	78	50	20
	2	8A	88	60	35	25
	3	8A	96	65	50	15
	4	8A	96	65	65	-
	5	9A	96	70	80	10
<b>450</b>	2	8A	88	60	35	25
	3	8A	96	65	50	15
	4	8A	104	70	65	5
	5	9A	104	70	80	10
	<b>500</b>	2	8A	88	60	35
3		8A	96	65	50	15
4		8A	104	70	65	5
5		9A	104	70	80	10
<b>560</b>		2	8A	88	60	35
	3	8A	96	65	50	15
	4	8A	104	70	65	5
	5	9A	104	70	80	10
	<b>630</b>	3	8A	104	65	50
4		8A	112	70	65	5
5		9A	120	75	80	5
<b>800</b>	3	8A	128	100	50	50
	4	8A	128	100	65	35
	5	8A	145	110	80	30



**8** (3 spokes)  
**8A** (6 spokes)



**9** (3 spokes)  
**9A** (6 spokes)

# Dimensions of V-Pulleys PT - solid hub




## PT SPB-B-5V


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
60	1	1	40	35*	25	10
	2	1	40	48*	44	4
71	1	1	45	35**	25	10
	2	1	45	48**	44	4
	3	1	45	67**	63	4
75	1	1	45	35	25	10
	2	1	45	48	44	4
	3	1	45	67	63	4
80	1	1	50	35	25	10
	2	1	50	48	44	4
	3	1	50	67	63	4
	4	1	52	86	82	4
	5	1	58	105	101	4
85	1	1	50	35	25	10
	2	1	50	48	44	4
	3	1	52	67	63	4
	4	1	58	86	82	4
	5	1	58	105	101	4
90	1	1	50	35	25	10
	2	1	50	48	44	4
	3	1	58	67	63	4
	4	2	65	50	82	32
	5	2	65	50	101	51
95	1	1	52	35	25	10
	2	1	55	48	44	4
	3	1	58	67	63	4
	4	2	65	50	82	32
	5	2	65	50	101	51
100	1	1	52	35	25	10
	2	1	55	48	44	4
	3	1	58	67	63	4
	4	2	65	50	82	32
	5	2	65	50	101	51
106	1	4	50	35	25	10
	2	4	55	48	44	4
	3	2	65	50	63	13
	4	2	65	50	82	32
	5	2	67	50	101	51
112	1	4	55	35	25	10
	2	4	60	48	44	4
	3	2	65	50	63	13
	4	2	75	50	82	32
	5	2	75	50	101	51
118	1	4	55	35	25	10
	2	4	60	48	44	4
	3	2	75	50	63	13
	4	2	75	50	82	32
	5	2	75	50	101	51
125	1	4	55	35	25	10
	2	4	60	48	44	4
	3	2	75	50	63	13
	4	5	75	50	82	32
	5	5	75	50	101	51
	6	2	80	60	120	60
132	1	4	60	35	25	10
	2	4	60	50	44	6
	3	5	75	50	63	13
	4	5	80	50	82	32
	5	5	80	60	101	41
	6	5	80	60	120	60

## » PT SPB-B-5V


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
140	1	4	60	35	25	10
	2	4	65	50	44	6
	3	5	75	50	63	13
	4	5	80	50	82	32
	5	5	80	60	101	41
	6	5	80	60	120	60
150	1	4	60	40	25	15
	2	4	65	50	44	6
	3	5	75	50	63	13
	4	5	80	50	82	32
	5	5	80	60	101	41
	6	5	88	60	120	60
160	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	60	101	41
	6	5	88	65	120	55
170	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	60	101	41
	6	5	104	65	120	55
180	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	70	120	50
190	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	70	120	50
200	1	4	68	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	80	120	40
212	1	4	68	45	25	20
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	80	120	40
224	1	4	68	45	25	20
	2	4	75	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	96	70	101	31
	6	5	104	80	120	40
236	1	4	68	45	25	20
	2	4	75	50	44	6
	3	5	80	60	63	3
	4	5	88	65	82	17
	5	5	96	75	101	26
	6	5	104	80	120	40




1



2



4



5

\* Note: the diameter at the bottom of the groove is 32 mm  
 \*\* Note: the diameter at the bottom of the groove is 43 mm

V-PULLEYS - PT


# Dimensions of V-Pulleys PT - solid hub




» PT SPB-B-5V

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
250	1	8	70	45	25	20
	2	8	75	50	44	6
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	4A	104	75	101	26
	6	4A	104	80	120	40
280	1	8	75	45	25	20
	2	8	75	50	44	6
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	9	104	75	101	26
	6	9	104	80	120	40
300	1	8	75	50	25	25
	2	8	80	50	44	6
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	9	104	75	101	26
	6	9	104	80	120	40
315	2	8	88	60	44	16
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	9	104	75	101	26
	6	9	120	90	120	30
	355	1	8A	80	50	25
2		8	88	60	44	16
3		9	96	60	63	3
4		9	96	65	82	17
5		9	104	75	101	26
6		9	120	90	120	30
400	2	8A	88	60	44	16
	3	8A	96	65	63	2
	4	9A	104	75	82	7
	5	9A	112	85	101	16
	6	9A	120	100	120	20
	450	2	8A	88	60	44
3		8A	96	65	63	2
4		9A	104	75	82	7
5		9A	112	85	101	16
6		9A	120	100	120	20
500		2	8A	96	65	44
	3	8A	104	75	63	12
	4	8A	112	85	82	3
	5	9A	120	90	101	11
	6	9A	128	105	120	15
	560	2	8A	96	65	44
3		8A	104	75	63	12
4		8A	112	85	82	3
5		9A	120	90	101	11
6		9A	128	105	120	15


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
630	2	8A	104	65	44	21
	3	8A	120	75	63	12
	4	8A	128	105	82	23
	5	8A	145	115	101	14
	6	9A	145	115	120	5
	710	2	8A	96	65	44
3		8A	112	75	63	12
4		8A	120	90	82	8
5		8A	128	105	101	4
6		9A	145	115	120	5
800		2	8A	104	70	44
	3	8A	120	90	63	27
	4	8A	128	105	82	23
	5	8A	145	115	101	14
	6	9A	145	115	120	5



**4**  
**4A (with lightening bores)**



**8 (3 spokes)**  
**8A (6 spokes)**



**9 (3 spokes)**  
**9A (6 spokes)**



# Dimensions of V-Pulleys PT - solid hub




## PT C


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	d [mm]	z [mm]
140	1	6	62	58	34	16	24
	2	7	70	58	59,5	16	2
	3	3	83	70	85	16	15
	4	3	83	74	110,5	16	37
	5	3	83	78	136	16	58
	6	3	83	78	161,5	20	84
150	1	6	70	59	34	16	25
	2	6	70	61	59,5	16	2
	3	3	93	70	85	16	15
	4	3	93	74	110,5	16	37
	5	3	93	78	136	16	58
	6	3	93	78	161,5	20	84
160	1	6	62	59	34	16	25
	2	6	70	61	59,5	16	2
	3	3	103	70	85	16	15
	4	3	103	74	110,5	20	37
	5	3	103	78	136	20	58
	6	3	103	78	161,5	20	84
170	1	6	70	60	34	16	26
	2	6	70	62	59,5	16	3
	3	7	78	74	85	20	11
	4	3	113	74	110,5	20	37
	5	3	113	78	136	20	58
	6	3	113	80	161,5	20	82
180	1	6	70	60	34	16	26
	2	6	70	60	59,5	16	1
	3	7	78	72	85	20	13
	4	7	82	74	110,5	20	37
	5	7	82	80	136	20	56
	6	7	87	72	161,5	20	90
190	1	6	70	60	34	16	26
	2	6	74	60	59,5	16	1
	3	7	78	72	85	20	13
	4	7	82	74	110,5	20	37
	5	7	84	80	136	20	56
	6	7	88	85	161,5	20	77
200	1	6	71	60	34	16	26
	2	6	73	72	59,5	20	13
	3	7	83	76	85	20	9
	4	7	90	88	110,5	20	23
	5	7	92	92	136	20	44
	6	7	96	98	161,5	20	64
224	1	6	71	63	34	20	29
	2	6	76	68	59,5	20	9
	3	7	83	76	85	20	9
	4	7	93	90	110,5	20	21
	5	7	93	92	136	25	44
	6	7	98	98	161,5	25	64
250	1	6	82	63	34	20	29
	2	6	82	71	59,5	20	12
	3	7	90	80	85	20	5
	4	7	95	90	110,5	20	21
	5	7	100	96	136	25	40
	6	7	102	102	161,5	25	60

## » PT C


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	d [mm]	z [mm]
280	1	6	82	64	34	20	30
	2	6	82	74	59,5	20	15
	3	7	90	80	85	20	5
	4	7	95	90	110,5	20	21
	5	7	100	96	136	25	40
	6	11	102	102	161,5	25	60
300	1	11	85	65	34	20	31
	2	11	90	75	59,5	20	16
	3	11	90	80	85	20	5
	4	11	105	90	110,5	20	21
	5	11	105	95	136	25	41
	6	11	105	107	161,5	25	55
315	1	11	85	65	34	20	31
	2	11	90	75	59,5	20	16
	3	11	90	80	85	20	5
	4	11	105	90	110,5	25	21
	5	11	105	95	136	25	41
	6	11	105	107	161,5	25	55
355	1	11	100	70	34	25	36
	2	11	105	80	59,5	25	21
	3	11	105	80	85	25	5
	4	11	115	90	110,5	25	21
	5	11	115	95	136	25	41
	6	11	115	110	161,5	25	52
400	1	11	100	70	34	25	36
	2	11	105	75	59,5	25	16
	3	11	105	80	85	25	5
	4	11	120	90	110,5	25	21
	5	11	120	95	136	25	41
	6	11	120	110	161,5	25	52
450	1	11	105	70	34	25	36
	2	11	110	75	59,5	25	16
	3	11	110	80	85	25	5
	4	11	120	95	110,5	32	16
	5	11	120	100	136	32	36
	6	11	120	110	161,5	32	52
500	1	11	110	75	34	25	41
	2	11	115	80	59,5	25	21
	3	11	115	85	85	25	-
	4	11	125	100	110,5	32	11
	5	11	125	110	136	32	26
	6	11	125	115	161,5	32	47
560	1	11	110	75	34	25	41
	2	11	115	80	59,5	25	21
	3	11	115	85	85	25	-
	4	11	125	100	110,5	32	11
	5	11	125	110	136	32	26
	6	11	125	115	161,5	32	47
630	1	11	115	75	34	25	41
	2	11	120	80	59,5	25	21
	3	11	120	95	85	25	10
	4	11	130	100	110,5	32	11
	5	11	130	110	136	32	26
	6	11	130	115	161,5	32	47




3



6



7





11

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



## “PBT” SPZ-Z-3V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
63	1	1	1108	11-28	62	22	6	-	16
	2	10	1108	11-28	-	22	6	38	28
	3	10	1108	11-28	-	22	18	38	40
67	1	1	1108	11-28	62	22	6	-	16
	2	10	1108	11-28	-	22	6	38	28
	3	10	1108	11-28	-	22	18	38	40
71	1	1	1108	11-28	62	22	6	-	16
	2	10	1108	11-28	-	22	6	42	28
	3	10	1108	11-28	-	22	18	42	40
75	1	1	1108	11-28	62	22	6	-	16
	2	10	1210	11-32	-	25	3	48	28
	3	10	1210	11-32	-	25	15	48	40
	4	10	1210	11-32	-	25	27	48	52
80	1	1	1210	11-32	75	25	9	-	16
	2	10	1210	11-32	-	25	3	52	28
	3	10	1210	11-32	-	25	15	52	40
	4	10	1210	11-32	-	25	27	52	52
85	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	57	28
	3	10	1610	12-42	-	25	15	57	40
	4	10	1610	12-42	-	25	27	57	52
	5	10	1610	12-42	-	25	39	57	64
90	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	62	28
	3	10	1610	12-42	-	25	15	62	40
	4	10	1610	12-42	-	25	27	62	52
	5	10	1610	12-42	-	25	39	62	64
	6	10	1610	12-42	-	26	50	62	76
95	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	67	28
	3	10	1610	12-42	-	25	15	67	40
	4	10	1610	12-42	-	25	27	67	52
	5	10	1610	12-42	-	25	39	67	64
	6	10	1610	12-42	-	26	50	67	76
100	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	71	28
	3	10	1610	12-42	10	25	15	71	40
	4	10	1610	12-42	-	25	27	71	52
	5	10	2012	14-50	-	32	32	71	64
	6	10	2012	14-50	-	32	44	71	76
106	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	76	28
	3	10	1610	12-42	-	25	15	76	40
	4	10	1610	12-42	-	25	27	76	52
	5	10	2012	14-50	-	32	32	76	64
	6	10	2012	14-50	-	31	45	76	76
112	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	84	28
	3	10	2012	14-50	-	32	8	84	40
	4	10	2012	14-50	-	32	20	84	52
	5	10	2012	14-50	-	32	32	84	64
	6	10	2012	14-50	-	31	45	84	76

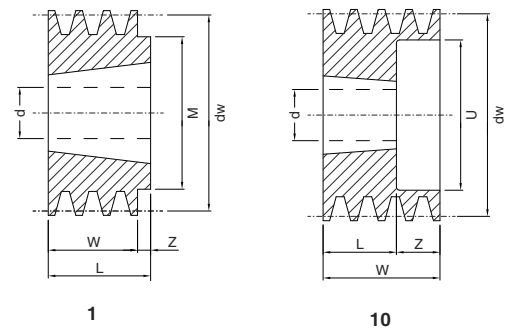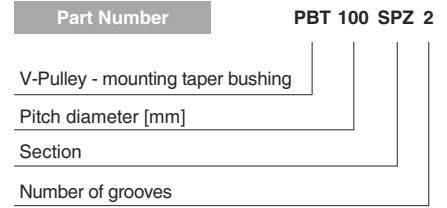


# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



» “PBT” SPZ-Z-3V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
118	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	90	28
	3	2	2012	14-50	-	32	8	90	40
	4	2	2012	14-50	-	32	20	90	52
	5	10	2012	14-50	-	32	32	90	64
	6	2	2012	14-50	-	31	45	90	76
125	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	98	28
	3	2	2012	14-50	-	32	8	98	40
	4	2	2012	14-50	-	32	20	98	52
	5	2	2012	14-50	-	32	32	98	64
	6	10	2517	18-65	-	46	30	98	76
132	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	103	28
	3	2	2012	14-50	-	32	8	103	40
	4	2	2012	14-50	-	32	20	103	52
	5	10	2517	18-65	-	45	19	103	64
	6	2	2517	18-65	-	46	30	103	76
140	1	4	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	112	28
	3	2	2012	14-50	-	32	8	112	40
	4	2	2012	14-50	-	32	20	112	52
	5	2	2517	18-65	-	45	19	112	64
	6	2	2517	18-65	-	46	30	112	76
150	1	4	1610	12-42	92	25	9	-	16
	2	1	2012	14-50	112	32	4	-	28
	3	2	2012	14-50	-	32	8	122	40
	4	2	2517	18-65	-	45	7	122	52
	5	2	2517	18-65	-	45	19	122	64
	6	2	2517	18-65	-	46	30	122	76
160	1	4	1610	12-42	92	25	9	-	16
	2	4	2012	14-50	112	32	4	-	28
	3	2	2012	14-50	-	32	8	131	40
	4	2	2517	18-65	-	45	7	131	52
	5	2	2517	18-65	-	45	19	131	64
	6	5	2517	18-55	120	46	30	133	76
180	1	4	1610	12-42	92	25	9	152	16
	2	4	2012	14-50	106	32	4	152	28
	3	5	2012	14-50	106	32	8	152	40
	4	2	2517	18-65	-	45	7	152	52
	5	2	2517	18-65	-	45	19	152	64
	6	5	2517	18-55	120	46	30	152	76
190	2	4	2012	14-50	106	32	10	162	28
200	1	4	2012	14-50	112	32	16	171	16
	2	4	2012	14-50	112	32	4	171	28
	3	6	2012	14-50	112	32	4	171	40
	4	6	2517	18-65	125	45	3,5	171	52
	5	6	2517	18-65	-	45	9,5	171	64
	6	6	2517	18-65	120	46	15	171	76
224	1	12	2012	14-50	110	32	8	195	16
	2	7	2012	14-50	112	32	4	195	28
	3	6	2012	14-50	112	32	4	195	40
	4	6	2517	18-65	124	45	3,5	195	52
	5	6	2517	18-65	124	45	9,5	195	64
	6	5	2517	18-65	120	46	30	195	76

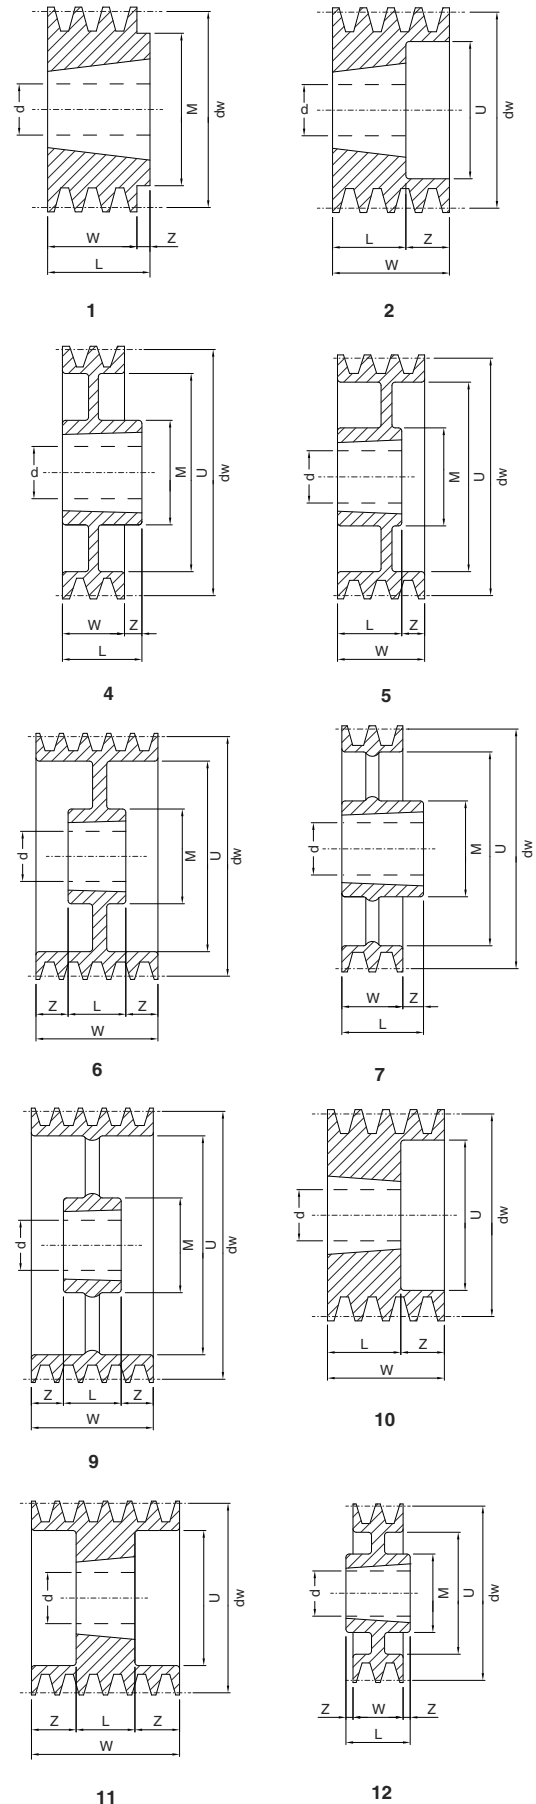


# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» "PBT" SPZ-Z-3V


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
250	1	3	2012	14-50	110	32	8	223	16
	2	3	2012	14-50	110	32	2	223	28
	3	9	2012	14-50	112	32	4	223	40
	4	6	2517	18-65	124	45	3,5	223	52
	5	6	2517	18-65	124	45	9,5	223	64
	6	6	2517	18-65	120	46	15	223	76
280	1	3	2012	14-50	110	32	8	252	16
	2	3	2012	14-50	112	32	2	252	28
	3	3	2517	18-65	124	45	2,5	252	40
	4	9	2517	18-65	124	45	3,5	252	52
	5	9	2517	18-65	124	45	9,5	252	64
	6	8	2517	18-55	120	46	30	252	76
315	1	3	2012	14-50	110	32	8	288	16
	2	3	2012	14-50	110	32	2	288	28
	3	3	2517	18-65	120	45	2,5	288	40
	4	9	2517	18-65	120	45	3,5	288	52
	5	9	2517	18-65	120	45	9,5	288	64
	6	6	2517	18-65	125	45	15,5	288	76
355	1	3	2012	14-50	110	32	8	326	16
	2	3	2012	14-50	112	32	2	326	28
	3	3	2517	18-65	125	45	2,5	326	40
	4	9	2517	18-65	124	45	3,5	326	52
	5	9	2517	18-65	124	45	9,5	326	64
	6	8	2517	18-65	120	46	30	326	76
400	1	3	2012	14-50	110	32	8	372	16
	2	3	2517	18-65	120	45	8,5	372	28
	3	3	2517	18-65	120	45	2,5	372	40
	4	9	2517	18-65	120	45	3,5	372	52
	5	9	3020	22-75	146	51	6,5	372	64
	6	9	3030	25-75	150	76	-	372	76
450	1	3	2517	18-65	124	45	14,5	421	16
	2	3	2517	18-65	124	45	8,5	421	28
	3	3	2517	18-65	124	45	2,5	421	40
	4	9	3020	22-75	146	51	0,5	421	52
	5	9	3020	22-75	146	51	6,5	421	64
	6	8	3020	22-75	140	76	-	421	76
500	1	7	2517	18-65	120	46	30	473	16
	2	3	2517	18-65	125	45	8,5	473	28
	3	3	2517	18-65	120	45	2,5	473	40
	4	9	3020	22-75	146	51	1	473	52
	5	3	3030	25-75	146	76	6	473	64
	6	9	3020	22-75	140	76	-	473	76
630	1	7	2517	18-65	120	46	30	603	16
	2	7	2517	18-65	120	46	18	603	28
	3	3	2517	18-65	120	46	3	603	40
	4	9	3020	22-75	146	51	0,5	603	52
	5	9	3020	22-75	146	51	6,5	603	64




3




6



7



8




9

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




## “PBT” SPA-A


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
67	2	10	1108	11-28	-	22	13	37	35
71	1	1	1108	11-28	60	22	2	-	20
	2	10	1108	11-28	-	22	13	40	35
	3	10	1108	11-28	-	22	28	40	50
75	1	1	1108	11-28	60	22	2	-	20
	2	10	1108	11-28	-	22	13	44	35
	3	10	1108	11-28	-	22	28	44	50
80	1	1	1210	11-32	84	25	5	-	20
	2	10	1210	11-32	-	25	10	50	35
	3	10	1210	11-32	-	25	25	50	50
85	1	1	1210	11-32	88	25	5	-	20
	2	10	1210	11-32	-	25	10	55	35
	3	10	1210	11-32	-	25	25	55	50
90	1	1	1210	11-32	90	25	5	-	20
	2	10	1610	12-42	-	25	10	60	35
	3	10	1610	12-42	-	25	25	56	50
	4	10	1615	12-42	-	38	27	60	65
95	1	1	1210	11-32	90	25	5	-	20
	2	10	1610	12-42	-	25	10	62	35
	3	10	1610	12-42	-	25	25	62	50
	4	10	1615	12-42	-	38	27	62	65
100	1	1	1610	12-42	92	25	5	-	20
	2	10	1610	12-42	-	25	10	66	35
	3	2	1610	12-42	-	25	25	66	50
	4	2	1615	12-42	-	38	27	66	65
	5	2	1615	12-42	-	38	42	66	80
106	1	1	1610	12-42	85	25	5	-	20
	2	10	1610	12-42	-	25	10	72	35
	3	2	1610	12-42	-	25	25	72	50
	4	10	2012	14-50	-	32	33	72	65
	5	10	2012	14-50	-	32	48	72	80
112	1	1	1610	12-42	90	25	5	-	20
	2	10	1610	12-42	-	25	10	77	35
	3	10	2012	14-50	-	32	18	77	50
	4	10	2012	14-50	-	32	33	77	65
	5	10	2012	14-50	-	32	48	77	80
118	1	1	1610	12-42	96,4	25	5	-	20
	2	10	1610	12-42	-	25	10	85	35
	3	2	2012	14-50	-	32	18	85	50
	4	2	2012	14-50	-	32	33	85	65
	5	2	2012	14-50	-	32	48	85	80
125	1	1	1610	12-42	92	25	20	-	20
	2	10	1610	12-42	-	25	10	92	35
	3	2	2012	14-50	-	32	18	92	50
	4	2	2012	14-50	-	32	33	92	65
	5	11	2012	14-50	-	32	24	92	80
132	1	1	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	97	35
	3	2	2012	14-50	-	32	18	97	50
	4	2	2517	18-65	-	45	20	97	65
	5	11	2517	18-65	-	45	17,5	102	80
140	1	1	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	106	35
	3	10	2517	18-65	-	45	5	106	50
	4	2	2517	18-65	-	45	20	106	65
	5	11	2517	18-65	-	45	17,5	106	80




1



2



10




11

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» "PBT" SPA-A


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
150	1	4	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	116	35
	3	10	2517	18-65	-	45	5	116	50
	4	2	2517	18-65	-	45	20	116	65
	5	11	2517	18-65	-	45	17,5	116	80
160	1	4	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	126	35
	3	10	2517	18-65	-	45	5	126	50
	4	2	2517	18-65	-	45	20	126	65
	5	11	2517	18-65	-	45	17,5	126	80
170	1	4	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	135	35
	3	10	2517	18-65	-	45	5	135	50
	4	2	2517	18-65	-	45	20	135	65
	5	11	2517	18-65	-	45	17,5	135	80
180	1	4	1610	12-42	92	25	5	146	20
	2	6	2012	14-50	108	32	1,5	146	35
	3	10	2517	18-65	-	45	5	146	50
	4	2	2517	18-65	-	45	20	146	65
	5	11	3020	22-75	-	51	14,5	146	80
190	1	4	1610	12-42	92	25	5	156	20
	2	6	2012	14-50	108	32	1,5	156	35
	3	10	2517	18-65	-	45	5	156	50
	4	2	2517	18-65	-	45	20	156	65
	5	2	3020	22-75	-	51	29	156	80
200	1	4	2012	14-50	108	32	12	165	20
	2	12	2517	18-65	123	45	5	165	35
	3	6	2517	18-65	123	45	2,5	165	50
	4	2	3020	22-75	-	51	14	165	65
	5	11	3020	22-75	-	51	14,5	165	80
212	1	4	2012	14-50	110	32	12	178	20
	2	4	2517	18-65	120	45	10	178	35
	3	6	2517	18-65	123	45	2,5	189	50
	4	2	3020	22-75	-	51	14	178	65
224	1	7	2012	14-50	112	32	12	189	20
	2	4	2517	18-65	124	45	10	189	35
	3	6	2517	18-65	124	45	2,5	189	50
	4	2	3020	22-75	-	51	14	189	65
	5	2	3020	22-75	-	51	29	189	80
236	1	7	2012	14-50	105	32	12	206	20
	2	7	2517	18-65	124	45	10	203	35
	3	9	2517	18-65	124	45	2,5	203	50
	4	6	3020	22-75	146	51	7	203	65
	5	6	3020	22-75	155	51	14,5	203	80
250	1	3	2012	14-50	112	32	6	215	20
	2	3	2517	18-65	124	45	5	215	35
	3	9	2517	18-65	124	45	2,5	215	50
	4	6	3020	22-75	159	51	7	215	65
	5	6	3020	22-75	159	51	14,5	215	80
280	1	7	2012	14-50	110	32	10	246	20
	2	7	2517	18-65	120	45	10	246	35
	3	9	2517	18-65	124	45	2,5	246	50
	4	9	3020	22-75	146	51	7	246	65
	5	12	3535	25-90	175	89	4,5	246	80
300	1	7	2012	14-50	112	32	12	266	20
	2	7	2517	18-65	124	45	10	266	35
	3	7	3020	22-75	146	51	1	266	50
	4	9	3020	22-75	146	51	7	266	65
	5	4	3535	25-90	175	89	9	266	80




1




2




3




4




6




7




9



10



11




12

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» “PBT” SPA-A


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
315	1	7	2012	14-50	110	32	10	282	20
	2	7	2517	18-65	120	45	10	282	35
	3	3	3020	22-75	146	51	0,5	282	50
	4	9	3020	22-75	146	51	7	282	65
	5	12	3535	25-90	175	89	4,5	282	80
355	1	7	2012	14-50	110	32	10	322	20
	2	7	2517	18-65	120	45	10	322	35
	3	3	3020	22-75	146	51	0,5	322	50
	4	9	3020	22-75	146	51	7	322	65
	5	3	3535	22-75	175	89	4,5	322	80
400	1	7	2012	14-50	110	32	10	366	20
	2	7	2517	18-65	120	45	10	366	35
	3	7	3020	22-75	159	51	1	366	50
	4	9	3020	22-75	146	51	7	366	65
	5	3	3535	25-90	180	89	9	366	80
450	1	7	2012	14-50	110	32	12	416	20
	2	7	2517	18-65	120	45	10	416	35
	3	7	3020	22-75	159	51	1	416	50
	4	9	3020	22-75	146	51	7	416	65
	5	3	3535	22-75	175	89	4,5	416	80
500	1	7	2517	18-65	120	45	25	467	20
	2	7	2517	18-65	120	45	10	467	35
	3	7	3020	22-75	159	51	1	465	50
	4	9	3020	22-75	146	51	7	467	65
	5	3	3535	25-90	180	89	9	467	80
560	1	7	2517	18-65	124	45	25	526	20
	2	7	3020	22-75	146	51	16	526	35
	3	7	3020	22-75	146	51	1	526	50
	4	3	3535	25-90	175	89	12	526	65
	5	3	3535	25-90	178	89	9	526	80
630	1	7	2517	18-65	124	45	25	596	20
	2	3	3020	22-75	159	51	8	596	35
	3	7	3020	22-75	160	51	1	596	50
	4	3	3535	25-90	175	89	12	596	65
	5	3	3535	25-90	178	89	9	596	80
800	2	3	3535	25-90	178	89	27	765	35
	3	3	3535	25-90	178	89	19,5	765	50
	4	3	3535	25-90	178	89	12	765	65
	5	3	4040	40-100	216	102	11	765	80
	900	3	3	3535	25-90	178	89	19,5	865
4		3	3535	25-90	178	89	12	865	65
5		3	4040	40-100	216	102	11	865	80
1000	3	3	3535	25-90	178	89	19,5	965	50
	4	3	4040	40-100	216	102	18,5	965	65
	5	3	4545	55-110	242	114	17	965	80




3




4



7



9




12

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



## “PBT” SPB-B-5V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
90	1	1	1210	14-50	-	25	-	-	25
	2	10	1210	14-50	-	25	19	52	44
	3	10	1210	14-50	-	25	38	50	63
100	1	1	1610	12-42	-	25	-	-	25
	2	10	1610	12-42	-	25	19	57	44
	3	10	1610	12-42	-	25	38	57	63
112	1	1	1610	12-42	-	25	-	-	25
	2	2	1610	12-42	-	25	19	69	44
	3	10	1610	12-42	-	25	38	69	63
	4	10	1610	12-42	-	25	57	72	82
118	1	1	1610	12-42	-	25	-	-	25
	2	2	1610	12-42	-	25	19	76	44
	3	10	1610	12-42	-	25	38	76	63
125	1	1	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	86	44
	3	2	2012	14-50	-	32	31	86	63
	4	11	2012	14-50	-	32	25	86	82
132	1	1	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	89	44
	3	2	2012	14-50	-	32	31	89	63
	4	11	2012	14-50	-	32	25	89	82
140	1	1	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	97	44
	3	2	2012	14-50	-	32	31	97	63
	4	11	2517	18-65	-	45	18,5	102	82
	5	11	2517	18-65	-	45	28	102	101
150	1	4	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	107	44
	3	2	2517	18-65	-	45	18	107	63
	4	11	2517	18-65	-	45	18,5	107	82
	5	11	2517	18-65	-	45	28	107	101
	6	11	2517	18-65	-	45	37,5	107	120
160	1	4	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	120	44
	3	2	2517	18-65	-	45	18	120	63
	4	11	2517	18-65	-	45	18,5	117	82
	5	11	2517	18-65	-	45	28	117	101
	6	11	3020	22-75	-	51	34,5	123	120
	8	11	3020	22-75	-	51	53,5	123	158
170	1	4	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	130	44
	3	2	2517	18-65	-	45	18	130	63
	4	11	2517	18-65	-	45	18,5	127	82
	5	11	3020	22-75	-	51	25	127	101
	6	11	3020	22-75	-	51	34,5	127	120
	8	11	3030*	25-75	-	51	53,5	130	158
180	1	6	1610	12-42	90	25	-	132	25
	2	1	2517	18-65	120	45	1	-	44
	3	2	2517	18-65	-	45	18	137	63
	4	11	2517	18-65	-	45	18,5	137	82
	5	11	3020	22-75	-	51	25	137	101
	6	11	3020	22-75	-	51	34,5	137	120
	8	11	3030	25-75	-	76	41	137	158
190	1	12	2012	14-50	104	32	3,5	147	25
	2	1	2517	18-65	120	45	1	-	44
	3	2	2517	18-65	-	45	18	147	63
	4	11	2517	18-65	-	45	18,5	147	82
	5	11	3020	22-75	-	51	25	147	101
	6	11	3020	22-75	-	51	34,5	147	120
	8	11	3030	25-75	-	76	41	147	158

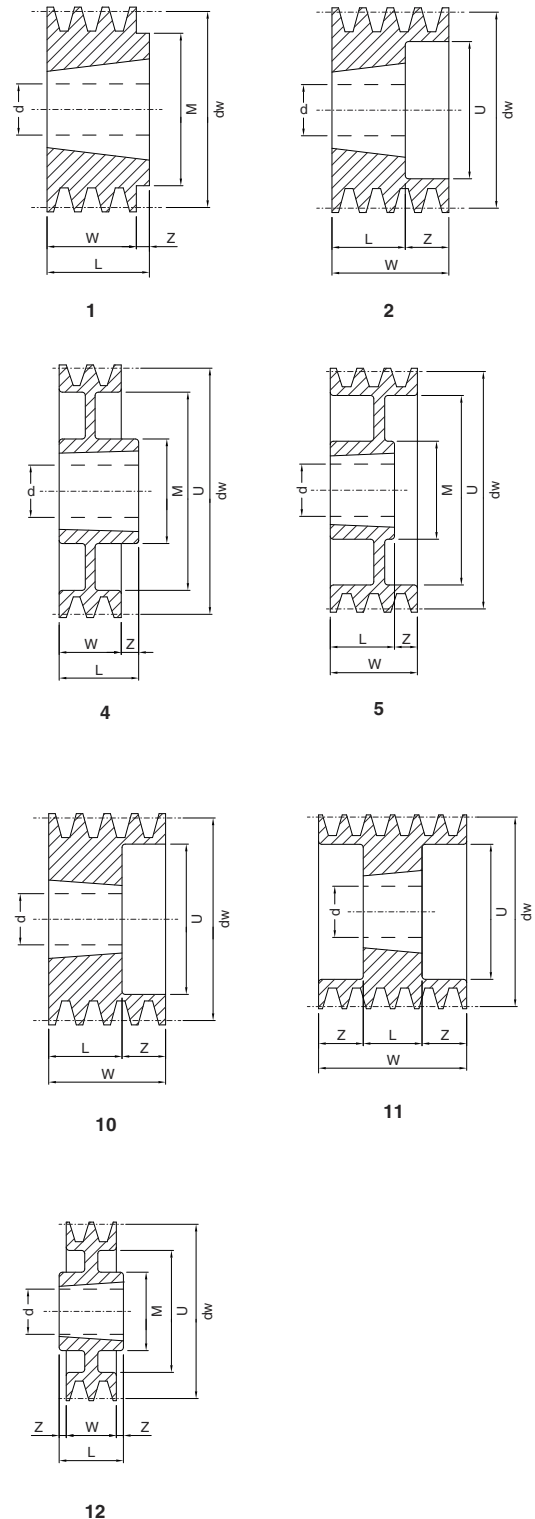

\* = PBT170SPB8 - taper bush type 3020 up to sold out.




# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



» “PBT” SPB-B-5V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
200	1	12	2012	14-50	104	32	3,5	157	25
	2	4	2517	18-65	117	45	1	-	44
	3	2	2517	18-65	-	45	18	157	63
	4	11	3020	22-75	-	51	15,5	157	82
	5	11	3020	22-75	-	51	25	157	101
	6	11	3020	22-75	-	51	34,5	157	120
212	1	3	2012	14-50	104	32	3,5	169	25
	2	4	2517	18-65	125	45	1	169	44
	3	5	2517	18-65	125	45	18	169	63
	4	11	3020	22-75	-	51	15,5	169	82
	5	11	3020	22-75	-	51	25	169	101
	6	11	3535	25-90	-	89	15,5	169	120
224	1	3	2012	14-50	104	32	3,5	181	25
	2	4	2517	18-65	117	45	1	181	44
	3	5	2517	18-65	117	45	18	181	63
	4	11	3020	22-75	-	51	15,5	181	82
	5	11	3020	22-75	-	51	25	181	101
	6	11	3535	25-90	-	89	15,5	181	120
236	1	3	2012	14-50	104	32	3,5	185	25
	2	4	2517	18-65	117	45	1	193	44
	3	5	2517	18-65	117	45	18	193	63
	4	11	3020	22-75	-	51	15,5	193	82
	5	11	3535	25-90	-	89	6	196	101
	6	11	3535	25-90	-	89	15,5	193	120
250	1	3	2012	14-50	104	32	3,5	207	25
	2	4	2517	18-65	124	45	1	207	44
	3	5	3020	22-75	144	51	12	207	63
	4	6	3020	22-75	144	51	15,5	207	82
	5	11	3535	25-90	-	89	6	207	101
	6	11	3535	25-90	-	89	15,5	207	120
280	1	3	2012	14-50	104	32	3,5	237	25
	2	7	2517	18-65	125	45	1	237	44
	3	9	3020	22-75	144	51	6	237	63
	4	6	3020	22-75	144	51	15,5	237	82
	5	6	3535	25-90	175	89	6	237	101
	6	6	3535	25-90	175	89	15,5	237	120
300	1	3	2012	14-50	104	32	3,5	285	25
	2	7	2517	18-65	125	45	1	257	44
	3	9	3020	22-75	144	51	6	257	63
	4	4	3535	25-90	175	89	7	257	82
	5	6	3535	25-90	175	89	6	257	101
	6	6	3535	25-90	175	89	15,5	257	120
315	1	3	2012	14-50	104	32	3,5	272	25
	2	7	2517	18-65	125	45	1	272	44
	3	9	3020	22-75	144	51	6	272	63
	4	3	3535	25-90	175	89	3,5	272	82
	5	6	3535	25-90	175	89	6	272	101
	6	6	3535	25-90	175	89	15,5	272	120
335	1	3	2012	14-50	104	32	3,5	292	25
	2	7	2517	18-65	125	45	1	292	44
	3	9	3020	22-75	144	51	6	292	63
	4	3	3535	25-90	175	89	3,5	292	82
	5	6	3535	25-90	175	89	6	292	101
	6	6	3535	25-90	175	89	15,5	292	120
353	1	3	2012	14-50	104	32	3,5	317	25
	2	7	2517	18-65	125	45	1	317	44
	3	9	3020	22-75	144	51	6	317	63
	4	3	3535	25-90	175	89	3,5	317	82
	5	6	3535	25-90	175	89	6	317	101
	6	6	3535	25-90	175	89	15,5	317	120

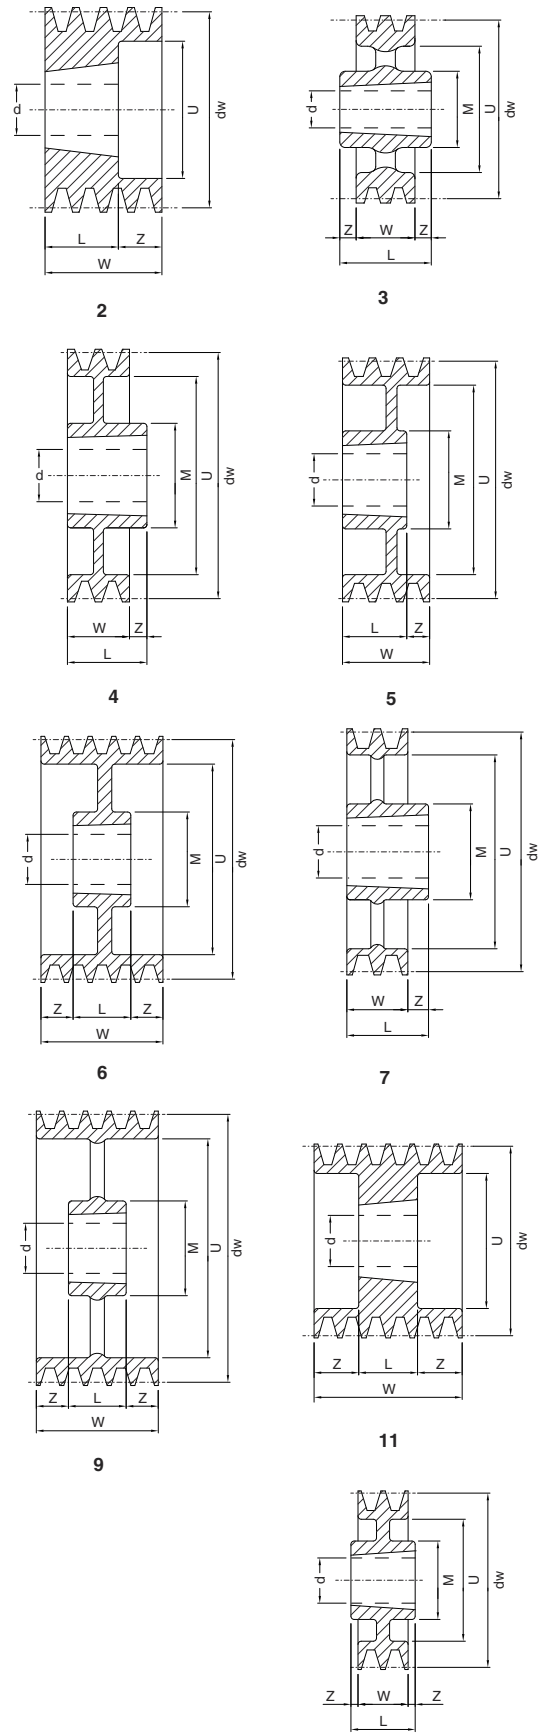


V-PULLEYS - PBT

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» “PBT” SPB-B-5V


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
355	2	3	3020	22-75	146	51	3,5	315	44
	3	9	3020	22-75	146	51	6	315	63
	4	3	3535	25-90	175	89	3,5	312	82
	5	6	3535	25-90	175	89	6	312	101
	6	6	3535	25-90	175	89	15,5	312	120
	8	6	3535	25-90	178	89	34,5	315	158
400	2	3	3020	22-75	146	51	3,5	357	44
	3	3	3535	25-90	175	89	13	357	63
	4	3	3535	25-90	175	89	3,5	357	82
	5	9	3535	25-90	175	89	6	357	101
	6	9	3535	25-90	175	89	15,5	357	120
	8	6	4040	40-100	215	102	28	357	158
450	2	3	3020	22-75	150	51	3,5	407	44
	3	7	3535	25-90	178	89	26	410	63
	4	7	3535	25-90	178	89	7	410	82
	5	8	3535	25-90	178	89	12	410	101
	6	8	4040	40-100	215	102	18	410	120
	8	9	4040	40-100	215	102	28	410	158
500	2	3	3020	22-75	146	51	3,5	460	44
	3	7	3535	25-90	178	89	26	460	63
	4	7	3535	25-90	178	89	7	460	82
	5	8	3535	25-90	178	89	12	460	101
	6	8	4040	40-100	215	102	18	460	120
	8	9	4040	40-100	215	102	28	460	158
560	2	3	3030	25-75	150	76	16	520	44
	3	7	3535	25-90	178	89	26	520	63
	4	7	3535	25-90	178	89	7	520	82
	5	7	4040	40-100	210	102	1	520	101
	6	8	4040	40-100	215	102	18	520	120
	8	9	4545	55-110	242	114	22	520	158
630	2	3	3030	25-75	150	76	16	590	44
	3	7	3535	25-90	178	89	26	590	63
	4	7	3535	25-90	178	89	7	590	82
	5	7	4040	40-100	215	102	1	590	101
	6	8	4040	40-100	215	102	18	590	120
	8	9	4545	55-110	242	114	22	590	158
710	2	3	3030	25-75	120	76	16	664	44
	3	3	3535	25-90	175	89	13	664	63
	4	3	3535	25-90	185	89	3,5	664	82
	5	7	4040	40-100	215	102	1	664	101
	6	9	4545	55-110	240	114	3	664	120
	8	9	4545	55-110	240	114	22	664	158
800	2	3	3535	25-90	175	89	22,5	754	44
	3	3	3535	25-90	175	89	13	754	63
	4	3	4040	40-100	215	102	10	754	82
	5	7	4040	40-100	215	102	1	754	101
	6	9	4545	55-110	240	114	3	754	120
	8	9	4545	55-110	240	114	22	754	158
900	3	3	3535	25-90	185	89	13	854	63
	4	3	4040	40-100	216	102	10	854	82
	5	7	4040	40-100	210	102	1	854	101
	6	9	4545	55-110	240	114	3	854	120
	8	9	4545	55-110	240	114	22	854	158
	1000	2	3	4040	40-100	216	102	29	954
3		3	4040	40-100	216	102	6	954	63
4		3	4040	40-100	216	102	4	954	82
5		3	4545	55-110	240	114	6,5	954	101
6		9	4545	55-110	240	114	3	954	120
8		9	5050	50-125	265	127	15,5	954	158
1250	3	3	4040	50-125	210	102	19,5	1204	63
	4	3	4545	55-110	242	114	16	1204	82
	5	3	4545	55-110	242	114	6,5	1204	101
	6	9	4545	55-110	242	114	3	1204	120
8	9	5050	50-125	280	127	15,5	1204	158	




3




6



7



8




9

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




## “PBT” SPC-C


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
212	3	11	3020	22-75	-	51	17	156	85
	4	11	3020	22-75	-	51	29,5	156	110,5
	5	11	3535	25-90	-	89	23,5	156	136
	6	11	3535	25-90	-	89	36,25	156	161,5
	8	11	3535	25-90	-	89	61,75	156	212,5
224	3	11	3020	22-75	-	51	17	173	85
	4	11	3535	49-90	-	89	11	168	110,5
	5	11	3535	25-90	-	89	23,5	173	136
	6	11	3535	25-90	-	89	36,25	173	161,5
	8	11	3535	25-90	-	89	62	168	212,5
236	3	11	3020	22-75	-	51	17	180	85
	4	11	3535	25-90	-	89	10,75	180	110,5
	5	11	3535	25-90	-	89	23,5	180	136
	6	11	3535	25-90	-	89	36,25	180	161,5
	8	11	3535	25-90	-	89	62	180	212,5
250	3	11	3020	22-75	-	51	17	194	85
	4	11	3535	25-90	-	89	10,75	198	110,5
	5	11	3535	25-90	-	89	23,5	198	136
	6	11	3535	25-90	-	89	36,25	198	161,5
	8	11	3535	25-90	-	89	61,75	198	212,5
265	3	1	3535	25-90	175	89	4	-	85
	4	11	3535	25-90	-	89	11	209	110,5
	5	11	3535	25-90	-	89	23,5	209	136
	6	11	3535	25-90	-	89	36,25	209	161,5
	8	11	3535	25-90	-	89	62	209	212,5
280	3	1	3535	49-90	175	89	4	-	85
	4	6	3535	25-90	175	89	10,75	228	110,5
	5	6	3535	25-90	-	89	23,5	224	136
	6	6	3535	25-90	175	89	36,25	228	161,5
	8	11	3535	25-90	-	89	62	224	212,5
300	3	12	3535	25-90	175	89	2	244	85
	4	6	3535	25-90	175	89	10,75	244	110,5
	5	6	3535	25-90	175	89	23,5	247	136
	6	6	3535	25-90	175	89	36,25	247	161,5
	8	11	4040	40-100	-	102	55,5	244	212,5
315	3	12	3535	25-90	175	89	2	259	85
	4	6	3535	25-90	175	89	11	259	110,5
	5	6	3535	25-90	175	89	23,5	279	136
	6	6	3535	25-90	175	89	36,25	259	161,5
	8	11	4040	40-100	-	102	55,5	259	212,5
335	3	3	3535	25-90	175	89	2	279	85
	4	9	3535	25-90	175	89	11	279	110,5
	5	6	3535	25-90	175	89	23,5	279	136
	6	6	3535	25-90	175	89	36,25	279	161,5
	8	6	4040	40-100	210	102	55,25	282	212,5
355	3	3	3535	25-90	175	89	2	299	85
	4	9	3535	25-90	175	89	11	299	110,5
	5	9	3535	25-90	175	89	23,5	299	136
	6	6	3535	25-90	175	89	36,25	299	161,5
	8	6	4040	40-100	216	102	55,5	299	212,5
400	3	3	3535	25-90	178	89	2	342	85
	4	9	3535	25-90	178	89	10,75	342	110,5
	5	9	3535	25-90	175	89	23,5	342	136
	6	6	4040	40-100	215	102	29,75	342	161,5
	8	6	4545	55-110	242	114	49,5	344	212,5
450	3	3	3535	25-90	178	89	2	393	85
	4	9	3535	25-90	178	89	10,75	393	110,5
	5	9	4040	40-100	215	102	17	393	136
	6	6	4545	55-110	242	114	24	393	161,5
	8	6	5050	50-125	267	127	43	393	212,5




1




3




6



9



11




12

# Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» "PBT" SPC-C


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
475	3	3	3535	25-90	170	89	2	419	85
500	3	3	3535	25-90	178	89	2	443	85
	4	9	3535	25-90	175	89	11	443	110,5
	5	9	4040	40-100	215	102	17	443	136
	6	9	4545	55-110	242	114	24	443	161,5
560	8	6	5050	50-125	267	127	42,75	443	212,5
	3	3	3535	25-90	178	89	2	503	85
	4	9	4040	40-100	215	102	4,25	503	110,5
	5	9	4545	55-110	242	114	11	503	136
630	6	9	5050	50-125	267	127	17,25	503	161,5
	8	9	5050	50-125	267	127	42,75	503	212,5
	3	3	4040	40-100	215	102	8,5	573	85
	4	9	4545	55-110	242	114	1,5	573	110,5
710	5	9	5050	50-125	267	127	4,5	573	136
	6	9	5050	50-125	265	127	17,75	573	161,5
	8	9	5050	50-125	267	127	42,75	573	212,5
	3	3	4040	40-100	215	102	8,5	654	85
800	4	3	5050	50-125	267	127	8	654	110,5
	5	9	5050	50-125	265	127	4,5	654	136
	6	9	5050	50-125	265	127	17,25	654	161,5
	8	9	5050	50-125	265	127	43,75	654	212,5
800	3	3	4545	55-110	240	114	14,5	737	85
	4	3	5050	50-125	265	127	8,25	737	110,5
	5	9	5050	50-125	265	127	4,5	737	136
	6	9	5050	50-125	267	127	17,25	737	161,5
1000	8	9	5050	50-125	265	127	42,75	737	212,5
	3	3	5050	50-125	265	127	21	937	85
	4	3	5050	50-125	265	127	8,25	937	110,5
	5	9	5050	50-125	265	127	4,5	937	136
1250	6	9	5050	50-125	265	127	17,25	937	161,5
	8	9	5050	50-125	265	127	42,75	937	212,5
	3	3	5050	50-125	267	126	20,5	1190	85
	4	3	5050	50-125	267	126	7,75	1190	110,5
1250	5	9	5050	50-125	280	127	4,5	1190	136
	6	9	5050	50-125	280	127	17,25	1190	161,5
	8	9	5050	50-125	280	127	42,75	1190	212,5



3



6



9